


Configuring user dictionary

1. Overview

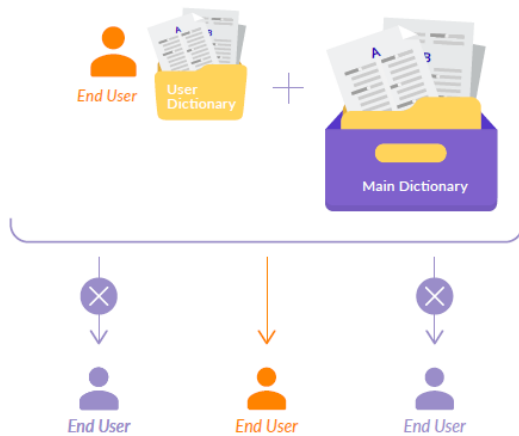

User dictionary is a special feature available for web-based system users where the WebSpellChecker products are integrated. It allows each end user to create personal dictionaries with custom words (complex words, acronyms, proper names, etc.) and use them while working with the system. All the words added to a personal dictionary will not be considered as misspellings, and they will be available in the suggestions list.

2. User-level dictionary user interface

2.1. User dictionary interface in WProofreader

- 1. Overview
- 2. User-level dictionary user interface
 - 2.1. User dictionary interface in WProofreader
 - 2.2. User dictionary interface in SCAYT plugin for CKEditor 4
- 3. Predefined user dictionary
 - Example 3.1. Setting up a predefined user dictionary in WProofreader
 - Example 3.2. Setting up a predefined user dictionary in SCAYT plugin for CKEditor 4



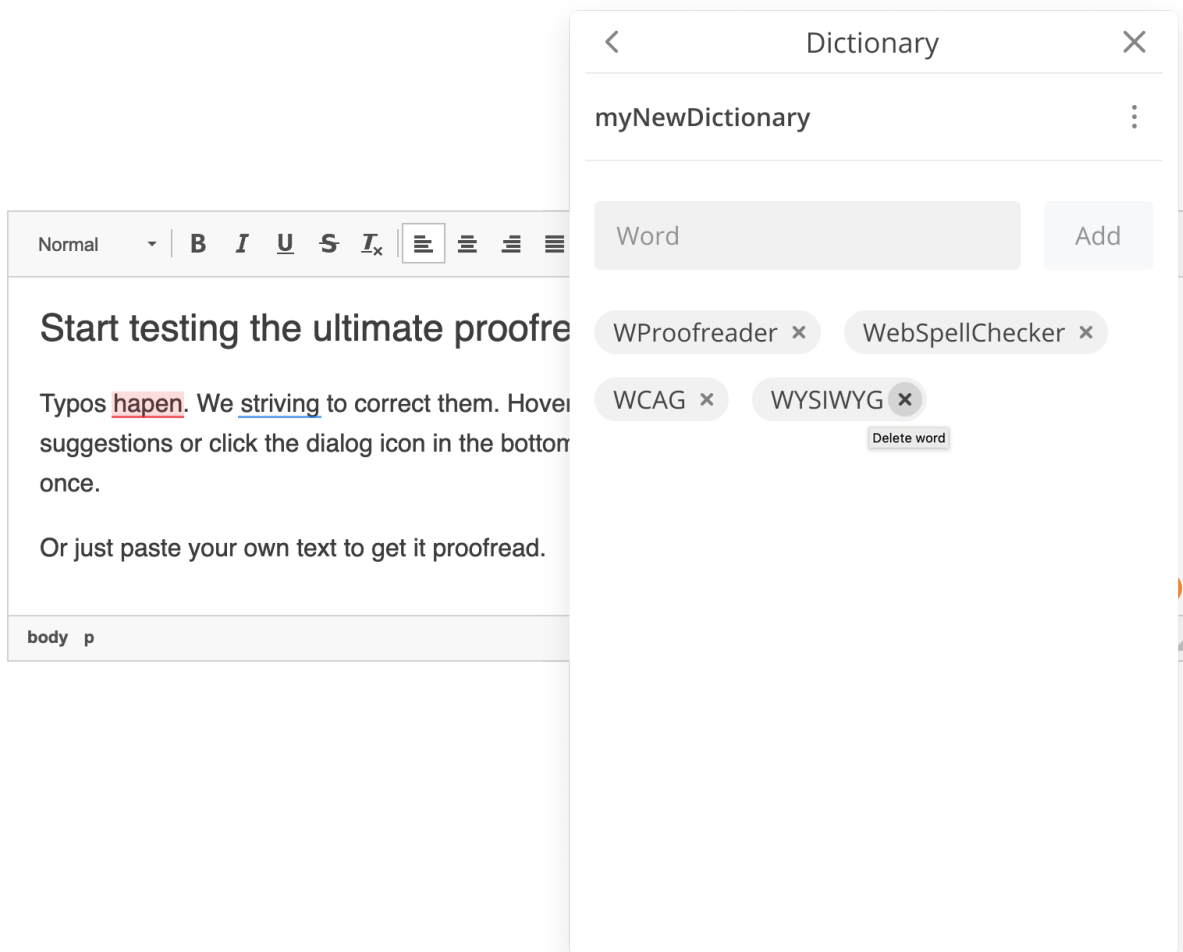


Image 2.1.1. User interface of user-level custom dictionary for WProofreader v3.x.x

2.2. User dictionary interface in SCAYT plugin for CKEditor 4

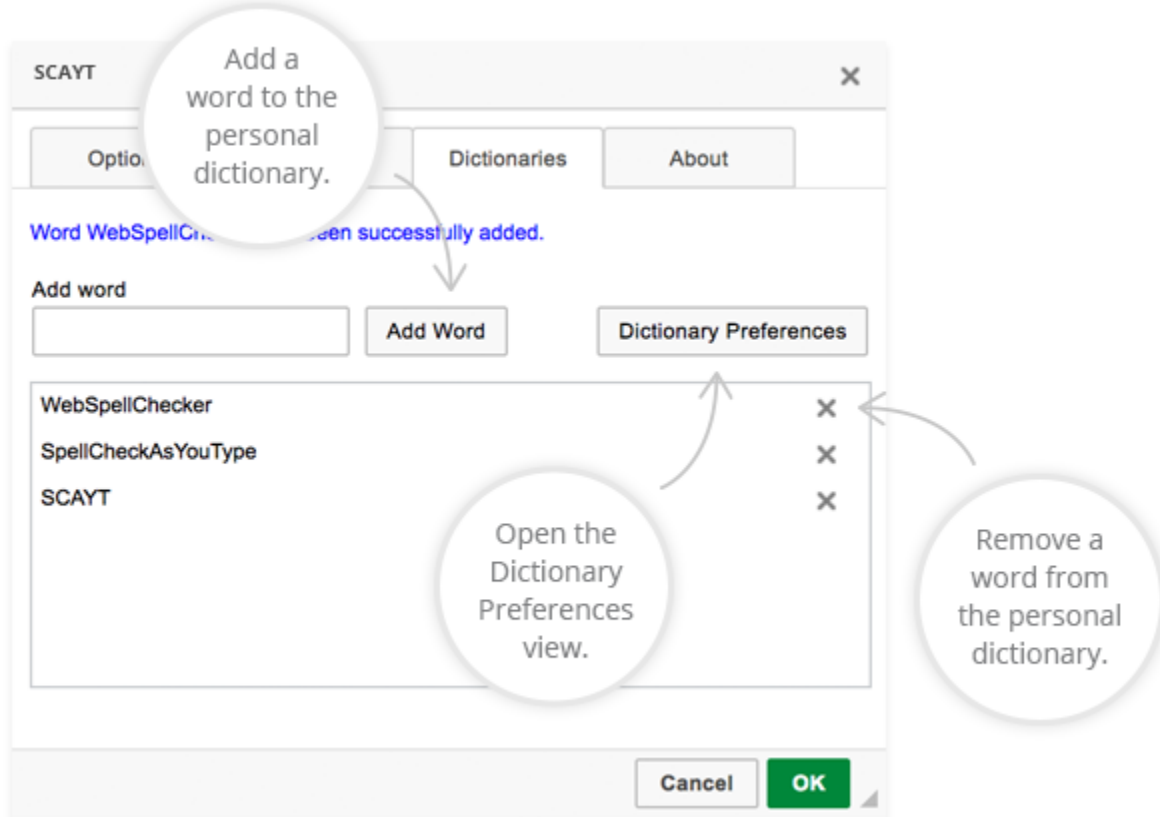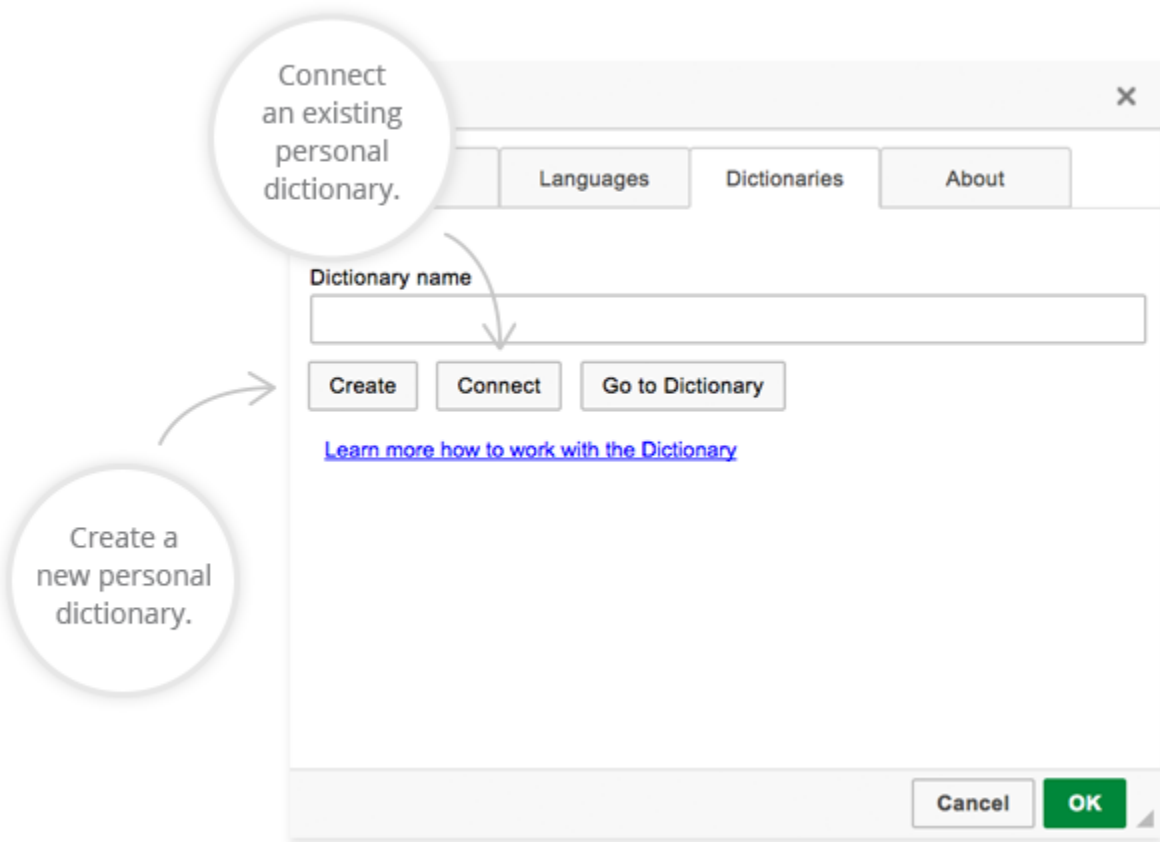

3. Predefined user dictionary


You have an option to set a predefined User Dictionary on your web app for a particular editable element. With such an approach all the words added using **Add word** by your end users will be saved and stored in the dictionary that you have previously defined. To do so, specify a required User Dictionary parameter and set your predefined dictionary as a value.

Product Integration	User Dictionary Parameter
SCAYT plugin for CKEditor 4	scayt_userDictionaryName
WSC Dialog plugin for CKEditor 4	wsc_userDictionaryName
WProofreader	userDictionaryName

Example 3.1. Setting up a predefined user dictionary in WProofreader

```
<script>
  window.WEBSPELLCHECKER_CONFIG = {
    autoSearch: true,
    serviceId: 'your-service-ID',
    userDictionaryName: 'your-user-dictionary-name'
  };
</script>
<script type="text/javascript" src="https://svc.webspellchecker.net/spellcheck31/wscbundle/wscbundle.js"></script>
```

Using **disableDictionariesPreferences** option you can also hide the section with the dictionary settings to prevent end users from removing or disabling the dictionary (the section is shown below). To do so, add one more option to WProofreader configuration:

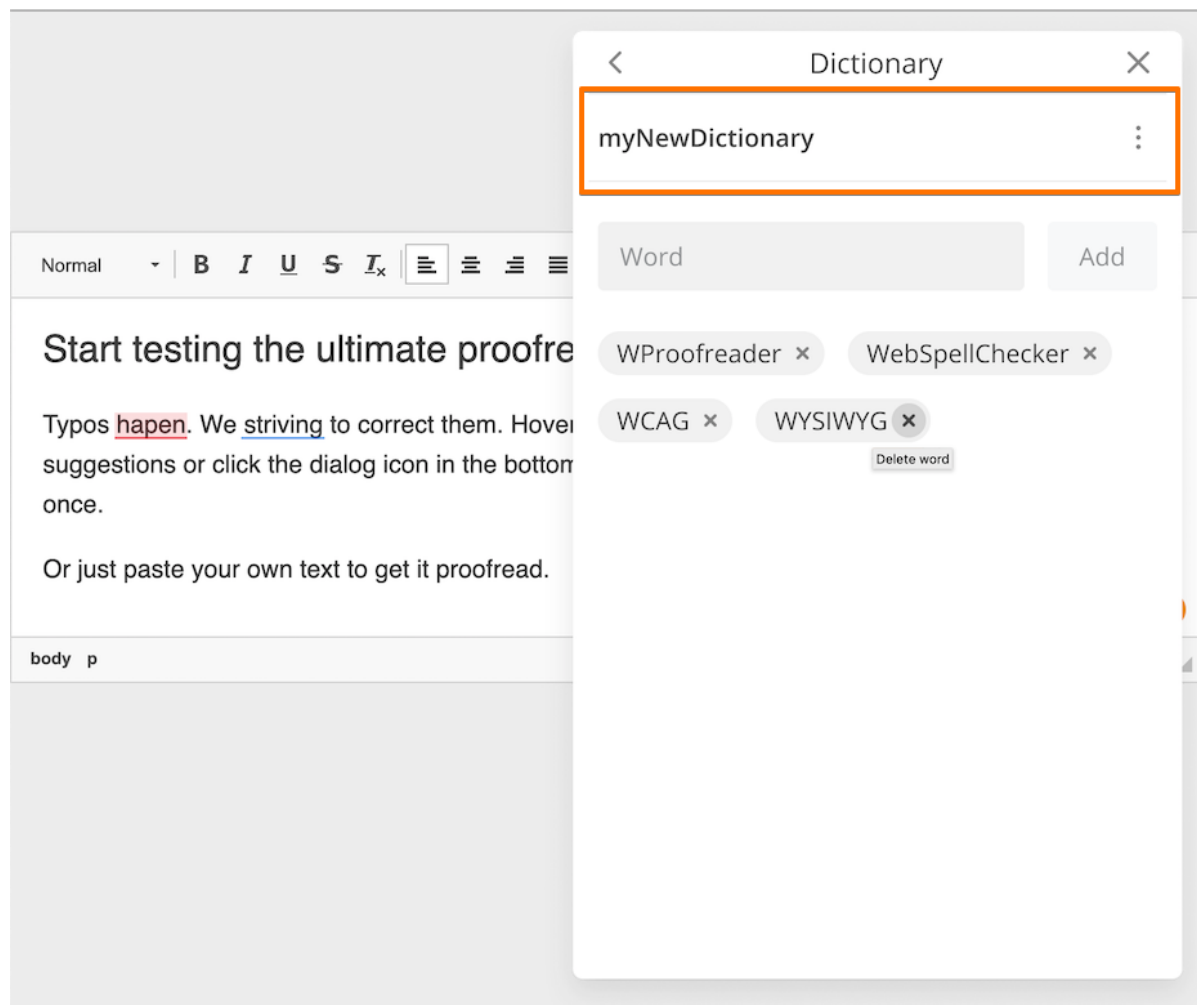

```
<script>
  window.WEBSPELLCHECKER_CONFIG = {
    autoSearch: true,
    serviceId: 'your-service-ID',
    userDictionaryName: 'your-user-dictionary-name',
    disableDictionariesPreferences: true
  };
</script>
<script type="text/javascript" src="https://svc.webspellchecker.net/spellcheck31/wscbundle/wscbundle.js"><
/script>
```

Example 3.2. Setting up a predefined user dictionary in SCAYT plugin for CKEditor 4

CKEditor config.js

```
config.scayt_customerId: "your-service-ID(activation key)",
config.scayt_autoStartup = true;
config.grayt_autoStartup = true;
config.scayt_sLang = "en_US";
config.scayt_userDictionaryName='user-dictionary-name';
```



For details and user dictionaries usage tips, refer to [User Dictionary FAQ](#) section.